




正视图

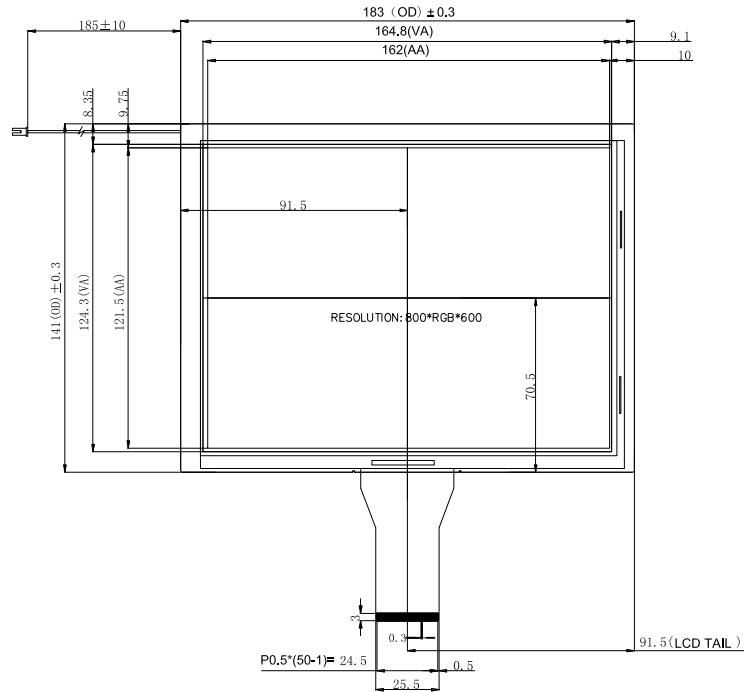

侧视图

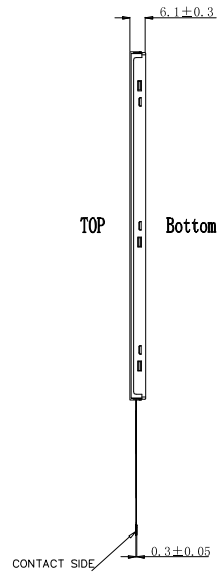


背视图

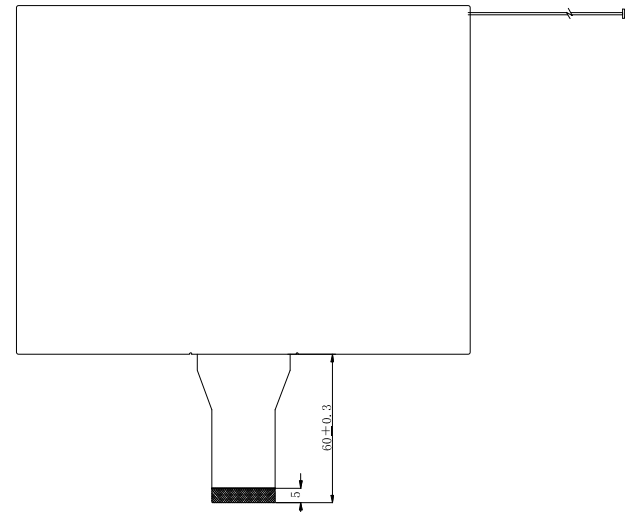

ASSIGNMENT:

1	NC	26	G1
2	NC	27	G0
3	NC	28	R7
4	NC	29	R6
5	GND	30	R5
6	VCOM	31	R4
7	VCC	32	R3
8	MODE	33	R2
9	DE	34	R1
10	VS	35	R0
11	HS	36	GND
12	B7	37	DOCLK
13	B6	38	GND
14	B5	39	L/R
15	B4	40	U/D
16	B3	41	VGH
17	B2	42	VGL
18	B1	43	AVDD
19	B0	44	RESET
20	G7	45	NC
21	G6	46	VCOM
22	G5	47	DITHB
23	G4	48	GND
24	G3	49	NC
25	G2	50	NC



BACKLIGHT CIRCUIT DIAGRAM

1	Operating Voltage:	VDD=3.3V typ.
2	Resolution:	800*600
3	Color:	16M
4	Interface:	RGB
5	Viewing Direction:	12:00
6	Operating Temp:	-20°C~70°C
7	Storage Temp:	-30°C~80°C
8	Backlight: LED	voltage:9.8V Forward Current:180mA
9	Unspecified tolerance:	±0.3

REVISION

REV	ECO NO	DESCRIPTION	DWN	DATE	CHKD	DATE	APVD	DATE	APVD	DATE
A		Initial		Oct./24/2014						

DRAWN BY Zhixing, Xu  
 DATE: Oct./24/2014  
 CHECKED BY  
 DATE:  
 APPROVED BY  
 DATE:  
 APPROVED BY  
 DATE:

UNLESS OTHERWISE SPECIFIED:  
 1) ALL DIMENSIONS ARE IN MM.  
 2) TOLERANCE  
 .XXX ±.127  
 .XX ±.254  
 ANGLES ±0.5°  
 THIRD ANGLE PROJECTION  
 DRAWING SIZE: C  
 DRAWING SCALE: NONE  
 DO NOT SCALE DRAWING

**POLYTRONIX, INC.** 805 ALPHA DRIVE  
 RICHARDSON, TX 75081  
 972.238.7045

CUSTOMER ID NUMBER: SHEET 1 OF 1

TITLE:

CAGE CODE NO. 2Y126 POLYTRONIX PART NUMBER: PT-80SV-NN-01 REV.: A