



VIEWING DIRECTION(EYE)

1.5MAX COMPONENT
CONTACT SIDE STIFFENER

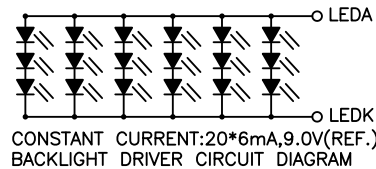

LCM(PIN DEFINE)			
PIN No.	SYMBOL	PIN No.	SYMBOL
1	VCOM	21	RXIN3+
2	VDD	22	GND
3	VDD	23	NC
4	NC	24	NC
5	REST	25	GND
6	STBYB	26	NC
7	GND	27	DIMO
8	RXIN0-	28	SELB
9	RXIN0+	29	AVDD
10	GND	30	GND
11	RXIN1-	31	LEDK
12	RXIN1+	32	LEDK
13	GND	33	L/R
14	RXIN2-	34	U/D
15	RXIN2+	35	VGL
16	GND	36	CABCEN1
17	RXCLKIN-	37	CABCEN0
18	RXCLKIN+	38	VGH
19	GND	39	LEDA
20	RXIN3-	40	LEDA

ITEM	PARAMETERS	ITEM	PARAMETERS	RoHS COMPLIANT	YES
LCD SIZE	7.0 inch(DIAGONAL)	VIEWING DIRECTION(EYE)	12 O'CLOCK		
LCD TYPE	TN/NORMALLY WHITE	OPERATING TEMPERATURE	-20°C TO +70°C		
RESOLUTION(H*V)	1024*600 PIXELS	STORAGE TEMPERATURE	-30°C TO +80°C		
POLARIZER TYPE	TRANSMISSIVE(ANTI-GLARE)	IC	ILI6150B2+ILI5120 OR COMPATIBLE		
POWER SUPPLY INPUT VOLTAGE	3.3V(VDD)	BACKLIGHT	EDGE,WHITE		
I/O LOGIC VOLTAGE	3.3V(VDDIO)	CONNECTOR	ZIF		

MARK"*"ARE IMPORTANT DIMENSIONS,MARK"()"ARE REFERENCE DIMENSIONS,MARK"*"ARE SPECIAL CHARACTERISTICS RELATED TO SAFETY,MARK"*" ARE SPECIAL CHARACTERISTICS IRRELEVANT TO SAFETY,MARK"●"ARE IMPORTANT CHARACTERISTICS EXCEPT FOR THE SPECIAL CHARACTERISTICS.

REVISION

REV	ECO NO	DESCRIPTION	DWN	DATE	CHKD	DATE	APVD	DATE	APVD	DATE
A		Initial		Sept./28/2015						

DRAWN BY
ZHIXING XU
DATE: Sept./28/2015
CHECKED BY
DATE:
APPROVED BY
DATE:
APPROVED BY
DATE:

UNLESS OTHERWISE SPECIFIED:
1) ALL DIMENSIONS ARE IN MM.
2) TOLERANCE
.XXX ±.127
.XX ±.254
ANGLES ±0.5°
THIRD ANGLE PROJECTION
DRAWING SIZE: C
DRAWING SCALE: NONE
DO NOT SCALE DRAWING

POLYTRONIX, INC. 805 ALPHA DRIVE
RICHARDSON, TX 75081
972.238.7045

CUSTOMER ID NUMBER: SHEET 1 OF 1

TITLE:

CAGE CODE NO. 2Y126 POLYTRONIX PART NUMBER: PT-70WS-NN-02 REV.: A