


PC-080101 Series

OUTLINE DIMENSION

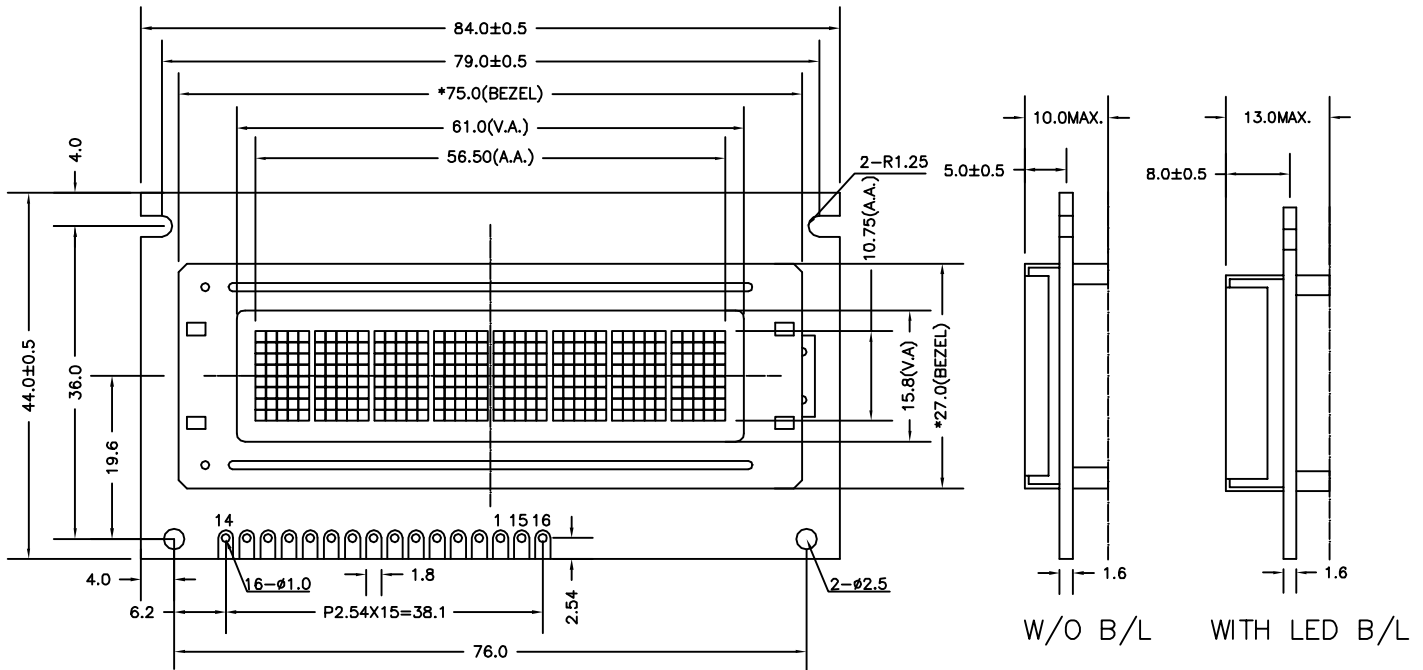

MECHANICAL DIMENSION


Overall Dimension (mm)	84.0 X 44.0 X 10.0/13.0
Viewing Area (mm)	61.0 X 15.8
Format	1 line X 8 Characters
Dot Size (mm)	1.25 X 1.30
Dot Pitch (mm)	1.30 X 1.35

ADSOLUTE MAXIMUM RATINGS

Parameter	Symbol	MIN	MAX	Unit
Supply Voltage for Logic	V _{dd} -V _{ss}	-0.3	+7.0	V
Supply Voltage for LCD	V _{lcd}	V _{dd} - 12.0	V _{dd} + 0.3	V
Input Voltage	V _{in}	-0.3	V _{dd} +0.3	V

ELECTRICAL CHARACTERISTICS (VDD=5.0V ; Top=25° C)

Parameter	Symbol	MIN	Typical	MAX	Unit
Power Supply Voltage	V _{dd} -V _{ss}		5.0		V
LCD Operating Voltage	V _{op}		4.8		V
LCM Current Consumption	I _{dd}				mA
Backlight Current Consumption	LED (Edge)				mA
	LED (Array)				mA
Driving Method	1/8 Duty 1/4 Bias				



Dot Size

PIN ASSIGMENT

Pin No.	Symbol	Function
1	VSS	Power Supply (GND)
2	VDD	Power Supply (+)
3	V0	Contrast Adjust
4	RS	Register select signal
5	R/W	Data Read / write
6	E	Enable Signal
7	DB0	Data Bus Line
8	DB1	Data Bus Line
9	DB2	Data Bus Line
10	DB3	Data Bus Line
11	DB4	Data Bus Line
12	DB5	Data Bus Line
13	DB6	Data Bus Line
14	DB7	Data Bus Line
15	LEDK	Power Supply for LED B/L (-)
16	LEDA	Power Supply for LED B/L (+)

NOTES

IC Controller / Driver: SPLC780D Or Equivalent
LCD Options: Y/G STN, Blue STN
Backlight Options: None, Yellow-Green LED ,White LED
Viewing Angle : 6:00
Operating Temperature Options: 0° C - +50° C, -20° C - +70° C
Storage Temperature Options: -20° C - +70° C, -30° C - +80° C